

PREMIUM CONFORMAL COATING FOR RELIABLE CIRCUIT PROTECTION

PRODUCT DESCRIPTION

Incure Ultra-Illumina™ 3511 is a high-performance structural adhesive engineered for advanced industrial assembly applications. This robust formulation delivers superior tensile strength and outstanding dimensional stability, remaining incredibly resilient under severe mechanical stress. The optimized curing profile and tailored rheology ensure absolutely seamless integration into modern manufacturing lines. It demonstrates exceptional resistance against thermal cycling, harsh solvents, and rigorous chemical environments. It fluoresces vividly under UV black light to enable high-speed automated visual inspection while providing an essential secondary heat-cure mechanism for shadowed areas. This Ultra-Illumina™ 3511 fully complies with RoHS and REACH while meeting high industrial reliability standards.

PRODUCT HIGHLIGHTS

- Ultra-Fast Curing Time
- High Tensile Strength
- Built-In UV Tracer
- Dual-Cure Heat Option
- Easy Dispensing

TYPICAL APPLICATIONS

- Sensor Potting
- PCB Conformal Coating
- Wire Tacking
- Component Encapsulation
- Structural Bonding

UNCURED PROPERTIES

Chemical Type	Urethane Acrylate		
Liquid Appearance	Clear, Fluorescing		
Density, g/ml	1.05	Refractive Index	1.48 @20°C
Surface Energy (Liquid), dynes/cm	38 / 40	Toxicity	Medium
¹ Viscosity, cP	100 to 200	Spindle	2 @20rpm

¹ Viscosity (cP) taken at 25°C - Other viscosities are available upon request with a small lab fee.
Email support@uv-incure.com or your nearest local distributor for more information.

CURED PROPERTIES

Shore Hardness, Durometer	D75 to D85	ASTM 2240
Linear Shrinkage, %	2.80	ASTM D2566
Water Absorption at 24hrs, %	1.5	² ISTM D570
Tensile (PSI)	PC-PC 450 [^] SS-SS 3,500	ASTM 638
	S-S 3,400 AL-AL 3,200	
Surface After Full Cure	Clear, Fluorescing	² ISTM D189
Elongation at Break, %	25	ASTM 638
Temperature Resistance, °C	-55 to 150	² ISTM D366
Service Temperature, °C	-55 to 80	² ISTM D366
Young's Modulus of Elasticity, PSI	275,600	³ ASTM 638
Linear CTE (α1 & α2), ppm/°C	55 / 160	² ISTM D696
Glass Transition Temp (Tg), °C	80	² ISTM D696

² ISTM D696 - refers to Incure Standard Test Method

³ ASTM 538 Young's Modulus test speed @5mm/min for rigid and semi-rigid materials, @50mm/min for non-rigid materials, unless otherwise specified.

RECOMMENDED UV CURE SCHEDULE (FULL CURE)

Full Cure Exposure Time		UVA	UVB	UVC	UVV
F200P (Between Glass Slides)	mW/cm ²	223	56	4	215
Exposure Time (s)	5	mJ/cm ²	1,115	280	1,075
F200P @3.75" Dist	10	mW/cm ²	223	56	4
Belt Speed (ft/min)	5.5	mJ/cm ²	2,230	560	40
F500 @3.0" Dist	8	mW/cm ²	436	127	12
Belt Speed (ft/min)	4.75	mJ/cm ²	3,488	1,016	96
S20 w/4-Pole L/G @0.4" Dist	mW/cm ²	3,000	530	50	3,400
Exposure Time (s)	2	mJ/cm ²	6,000	1,060	100
L9000 LED Spot @0.67" Dist	mW/cm ²	2,800	42	12	102
Exposure Time (s)	4	mJ/cm ²	11,200	168	48
					408

Cure times on 8mm ø adhesive sample. Belt speeds using C9000-F200Px1AB (Flood) and C9000-F500x1AC (Focused Beam) conveyors for area curing. Please consult IncureLab™ for any other requirements.

UV INTENSITY REFERENCE TABLE

Incure UV Curing Lamp Model	⁴ Curing Distance vs UV Intensity					
Spot Curing (Diameter)	0.5" (12.6)	1" (25.4)	1.5" (38)	2" (50.8)	2.5" (63.5)	3" (76.2)
S20 ARC (mW/cm ²) / (ø mm)	1,400 (3)	1,500 (4)	650 (6)	360 (8)	240 (10)	175 (12)
L9000 (mW/cm ²) / (ø mm)	7,500 (9)	5,000 (10)	2,300 (17)	1,200 (20)	700 (25)	450 (30)
Flood/Focus Beam (Area)	UV Intensity (mW/cm ²)					
F200P ARC Flood (6" x 8")	325	280	245	215	190	165
F400 ARC Flood (4" x 4")	860	570	440	345	270	215
F500 ARC Focused (3" x 5")	1,040	685	530	415	325	260
L1044-365 LED Flood (4" x 4")	2,675	2,380	1,900	1,625	1,430	1,280
L1044-405 LED Flood (4" x 4")	2,950	2,625	2,150	1,900	1,650	1,450

⁴ Curing Distance is defined by the tip of light-guide or base of lamp housing to the bond area. All values are nominal with ±10% variation, with LED Flood Static Uniformity at ±78% and Dynamic Uniformity at ±90%. Recommended curing parameters in grey

SHELF-LIFE, STORAGE, USE AND HANDLING OF THIS PRODUCT

Shelf-Life of this unopened product is a minimum of 6 months from date of manufacture. Avoid direct exposure of bottle to visible light at all times. Containers should remain covered when not in use. For optimal performance, product should be stored at between -30°C to -5°C. Thaw to 15°C to 35°C at least an hour before use. Transfer of product into other packages void all warranties. Users should ensure all bonding surfaces are free of grease, mold release, or any contaminants, as bonding performance will be compromised. All tests for cured bonds should be carried out at ambient temperature. Organic solvents, such as IPA, may be used to wipe away uncured material from surfaces. For safe handling of this product, please read Material Safety Data-sheet (MSDS) prior to use.

EtO and GAMMA STERILIZATION (Not Applicable for this Product)

Incure medical products are formulated to withstand standard sterilization methods, such as EtO and Gamma Radiation of 25 to 50 kGrays (cumulative). Enhanced moisture and thermal resistance ensure excellent adhesion strength after one steam autoclave cycle. Depending on bond design and application structure, users should test specific assemblies after sterilization. Consult Incure Support if devices are subjected to multiple sterilization cycles.

NOTE


The data contained in this document are furnished for information only. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein. Incure will not be liable for any indirect, special, incidental or consequential loss or damage arising from this Incure product, regardless of the legal theory asserted. Incure recommends that each user adequately test its proposed use and application before repetitive use, using this data as a guide.

SECONDARY HEAT CURE SCHEDULE

Continuous Oven Bake

110°C for 30mins
125°C for 15mins

LINEAR CTE (α1 & α2), ppm/°C

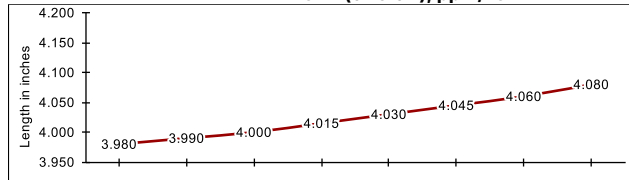

*TENSILE STRENGTH VS TEMPERATURE

*Not Applicable for Uni-Prime™ 338 and Acti™ 398

